


ÖSSUR LEGS SOCKET SOLUTIONS (TT/TF) ORDER FORM

FACILITY INFORI	MATION					
Company Name:			Ship to Address:			
Clinician Name:						
Contact Number:						
Email:						
Purchase Order#						
REQUIRED PATIE	NT INFORMATION					
Patient Name:			□Med □Low Amp g. K-Level: □K1 □K2	utation Level: ☐TT ☐TF ☐K3 ☐K4 ☐Left		
1. TT LINERS (che	ck one then fill in desii	red sizes and options)	_	_	_	
		2 Distal Cups, 1 Sleeve -	per order.			
LINER OPTIONS						
			ng Liners			
□ Iceform Locking	☐ Original Locking	□ Comfort Locking	☐ Dermo Locking	☐ Synergy Locking	☐ Sport Locking	
		•	•			
		□Wave	□Conical □Wave	□Wave		
Cushion Liners						
☐ Iceform Cushion	☐ Comfort Cushion	☐ Dermo Cushion	☐ Synergy Cushion	☐ Relax 3C Cushion	☐ Activa Cushion	
		□ Conical □ Wave	□Wave			
Seal-In Liners						
□ Seal-In V with Wave	□ Seal-In V HP with Wave	□ Dermo Seal-In	□ Seal-In X5 with Wave	□ Seal-In X with Rings	□ Seal-In X Locking	
0					The state of the s	

1. TT LINERS (check one then fill in desired sizes and options)							
LINER SPECIFICATIONS							
Liner Size	Optional: Add additional liner of same type						
LINER SIZE	LINER SIZE □ □ □ 3mm □ 6mm □ 9mm (Iceform Only)						
OPTIONAL ADD-ONS							
Optional: Add Distal Cups (Limit 2) Optional: A		d Sleeve (Limit 1)	Optional: Add Seal-Rings (Limit 2)				
DISTAL CUP SIZE DISTAL CUP SIZE DISTAL CUP SIZE DISTAL CUP SIZE	SLEEVE SIZE Sleev	orm	Seal-Ring 1 Classic Grip Volume RING SIZE	Seal-Ring 2 Classic Grip Volume RING SIZE			
NOTES:							

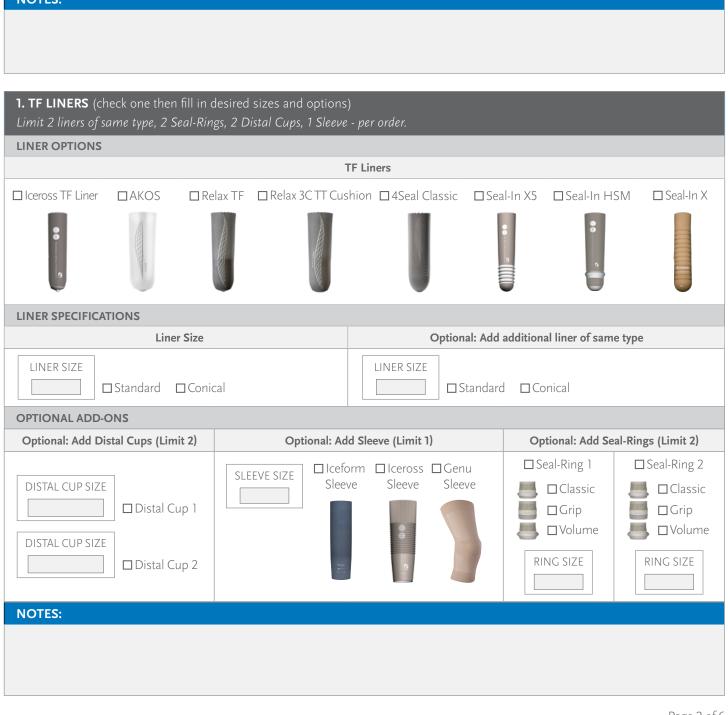

2. SUSPENSION OPTIONS (Choose for conventional socket fabrication) Refer to section 4 for Direct Socket Suspension Options

LOCKING OPTIONS

☐ 680 Fabrication Adaption Kit

Note: Required for 600 series fabrication



☐ 621 Ratchet Pin

☐ 651 Smooth Pin





□562 Hybrid

■214 Clutch



□ 200 Series Lanyard



□211 Clutch



Works With

☐ 600 Series Pyramid Socket Adapter



☐ 600 Series 4-Hole Socket Adapter



□ Add Extra Pin: □ Long □ Standard □Short

ICELOCK CLUTCH OPTIONS FOR TF

□214 AK for left leg with release button on medial side



□214 AK for left leg with release button on lateral side



□214 AK for right leg with release button on lateral side



UNITY

□214 AK for right leg with release button on medial side



EXPULSION OPTIONS

☐ 544 Expulsion Plate Kit for Seal-In



☐ 544 Expulsion Valve Kit for Sleeves



☐ Expulsion Valve 551 ☐ Expulsion Valve 552



☐ Unity TT Valve Kit ☐ Unity TF Valve Kit



☐ 544 Expulsion Plate Kit with Unity



☐ Unity TF Tube Kit



Works With

☐ 544 Socket Adapter



☐ Male Pyramid Socket Adapter



3. OPTIONAL: SOCKET ADAPTERS

Limit 2 Socket Adapters per order. 10% Discount applied to Socket Adapters.

☐ Male Pyramid Socket Adapter Titanium



☐ Icelock 544 Socket Adapter Aluminum



□ 3-Prong Socket Adapter Stainless Steel



☐ 4-Prong Socket Adapter Stainless Steel



☐ 4-Hole Socket Adapter Aluminum



☐ Male Pyramid Insert for Prong Stainless Steel



3. OPTIONAL: SOCKET ADAPTERS Limit 2 Socket Adapters per order. 10% Discount applied to Socket Adapters. ☐ Female Pyramid ☐ 4-Hole Male ☐ 4-Hole Female Insert for Prong Pyramid Pyramid Stainless Steel Aluminum Aluminum ☐ 4-Hole Female ☐ 4-Hole Female ☐ 4-Hole Female Pyramid with Pyramid 20/20 Pyramid 20/20 20/20 Offset Offset 10° Right Offset 10° Left Aluminum Aluminum Aluminum ☐ Euro 4-Hole ☐ 4-Hole Male ☐ 4-Hole Pyramid Adapter Pyramid with Receiver with Aluminum Rotation Rotation Stainless Steel Stainless Steel ☐ Female Pyramid ☐ 4-Hole Socket ☐ Female Pyramid Insert for Prong LP Insert for Prong Adapter Titanium Titanium Titanium ☐ 4-Hole Male ☐ Male Pyramid ☐ 4-Hole Male Pyramid with Insert for Prong Pyramid with 8mm Offset Rotation Titanium Titanium Titanium ☐ 4-Hole Female ☐ 4-Hole Male ☐ 4-Hole Female Pyramid Pyramid Pyramid with . Titanium Titanium Rotation Titanium ADAPTER CHARACTERISTICS Allows for use in a wet and/or humid environment but does Provides permanent protection against harmful ingress of not allow submersion. Fresh water splashing against the water. Even after submersion in water, the foot's structural enclosure from any direction shall have no harmful effect. Dry



WATERPROOF

parts maintain their integrity and continue to provide full support, function and durability.



WEATHERPROOF

thoroughly after contact with fresh water. Fresh water: Includes tap water. Excludes salt and chlorinated water.

NOTES:

4. DIRECT SOCKET SUSPENSION OPTIONS (Choose when fabricating your socket using a Direct Socket Kit)

imit 1 lock/valve kit per order

LOCKING

☐ 621 Ratchet Pin



☐651 Smooth Pin



Requires: Modular Spacer Plate



□214 Clutch Lock



☐ 562 Hybrid Lock with Unity (for TT only)



☐ 562 Hybrid Lock with Passive Vacuum (for TT only)



□ Add Extra Pin: □ Long □ Standard □ Short

☐ Expulsion Valve 551☐ Expulsion Valve 552

EXPULSION



Requires: Bottom Seal



■ Expulsion Plate



Requires: DS Adapter Plate



UNITY

☐ Unity TT Valve☐ Unity TF Valve



Requires: Bottom Seal



☐ 544 Unity Plate



☐ Unity TF Tube Kit



Requires: DS Adapter Plate



5. OPTIONAL: DIRECT SOCKET TT KITS (Select material and size)

Limit 1 Direct Socket Kit per orde

Braid: □4 inch □ 5 inch □ 7 inch

Resin: □ Black □ Neutral

GLASS

|--|

CARBON

☐ 5 inch with black resin☐ 7 inch with black resin☐



BASALT

☐ 4 inch with black resin☐ 5 inch with black resin☐

□7 inch with black resin



6. OPTIONAL: DIRECT SOCKET TF KITS GLASS BASALT DISTAL CONNECTOR DISTAL CONNECTOR □ Standard □ Standard ☐ Large ☐ Large Resin: Black □ Neutral Black Resin: □5 inch □ 7 inch □ 9 inch Braid: □5 inch □ 7 inch ☐ 9 inch **BRIM** (Select one when using a Direct Socket TF Kit) Limit 1 with purchase of Direct Socket TF Kit Size: □40 □ 42.5 □ 45 □ 47.5 □ 50 □ 52.5 □ 55 □ 57.5 □ 60 □ 62.5 □ 65 □ 67.5 **7**0

7. OPTIONAL: CONNECT TF PACKAGE KIT

Limit 1 Connect TF Socket Kit per order

☐ Connect TF Kit

Select your Size:

- ☐ Medium Short
 ☐ Medium Standard
- ☐ Large Short
- ☐ Large Standard

□ Left □ Right







Note: Connect TF is only available as an option when purchased with Iceross TF Locking liner(s), AKOS, and Relax. One Connect TF socket kit per order. Connect TF includes integrated 200 series clutch lock.

