


ÖSSUR LEGS SOCKET SOLUTIONS (TT/TF) ORDER FORM

FACILITY INFORMATION								
Company Name:	Ship to Address:							
Clinician Name:								
Contact Number:								
Email:								
Purchase Order#								
REQUIRED PATIE	NT INFORMATION							
Patient Name:		Impact Level: □ High	□Med □Low Amp	utation Level:	:			
	Weight: kg. K-Level: □K1 □K2 □K3 □K4 □Left □Right							
	ck one then fill in desi							
LINER OPTIONS	rie type, z seui-Rings, z	2 Distal Cups, 1 Sleeve - ,	per order.					
Locking Liners								
□ Iceform Locking	☐ Original Locking	□ Comfort Locking	□ Dermo Locking	☐ Synergy Locking	☐ Sport Locking			
				- 1				
					70			
	THE CO.		a	n e				
		□Wave	□ Conical □ Wave	□Wave				
Cushion Liners								
☐ Iceform Cushion	☐ Comfort Cushion	☐ Dermo Cushion	☐ Synergy Cushion	☐ Relax 3C Cushion	☐ Activa Cushion			
					1			
8		•	•		:			
	The state of the s	•	6					
		□ Conical □ Wave	□Wave					
Seal-In Liners								
□ Seal-In V with Wave	□ Seal-In V HP with Wave	□ Dermo Seal-In	□ Seal-In X5 with Wave	☐ Seal-In X with Rings	☐ Seal-In X Locking			
			:		-			
	100							
0		10						
					_			

1. TT LINERS (check one then fill in desired sizes and options)									
LINER SPECIFICATIONS									
Liner Size	Optional: Add additional liner of same type								
LINER SIZE □ □ 3mm □ 6mm	LINER SIZE □ □ □ 3mm □ 6mm □ 9mm (Iceform Only)								
OPTIONAL ADD-ONS									
Optional: Add Distal Cups (Limit 2)		d Sleeve (Limit 1)	Optional: Add Seal-Rings (Limit 2)						
DISTAL CUP SIZE DISTAL CUP SIZE DISTAL CUP SIZE Distal Cup 2	SLEEVE SIZE Sleev	orm	Seal-Ring 1 Classic Grip Volume RING SIZE	Seal-Ring 2 Classic Grip Volume RING SIZE					
NOTES:									

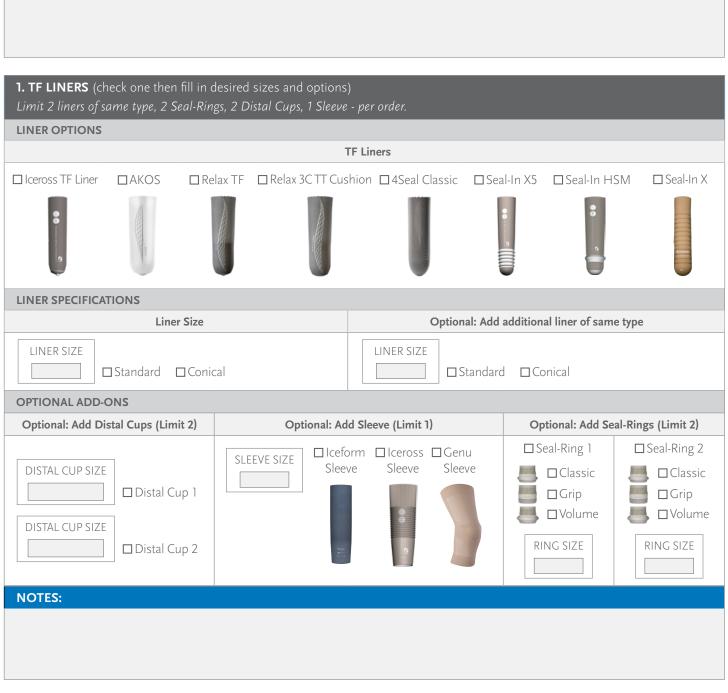

2. SUSPENSION OPTIONS (Choose for conventional socket fabrication) Refer to section 4 for Direct Socket Suspension Options LOCKING OPTIONS ☐ 680 Fabrication ☐ 621 Ratchet Pin ☐ 651 Smooth Pin ☐ 562 Hybrid □214 Clutch ☐ 200 Series Lanyard Adaption Kit □Unity ☐ Passive Vacuum Works With □211 Clutch ☐ 600 Series 4-Hole ☐ 600 Series Pyramid Socket Socket Adapter Adapter Note: Required for 600 series fabrication £ ☐ Add Extra Pin: □ Long □ Standard ☐Short **ICELOCK CLUTCH OPTIONS FOR TF** □214 AK for left leg with □214 AK for left leg with □214 AK for right leg with □214 AK for right leg with release button on medial side release button on lateral side release button on lateral side release button on medial side **EXPULSION OPTIONS** UNITY ☐ 544 Expulsion Plate ☐ 544 Expulsion Valve ☐ Expulsion Valve 551 ☐ Unity TT Valve Kit ☐ 544 Expulsion Plate Kit for Seal-In Kit for Sleeves ☐ Expulsion Valve 552 ☐ Unity TF Valve Kit Kit with Unity 0 ☐ Unity TF Tube Kit Works With ☐ Male Pyramid □544 Socket Socket Adapter Adapter 0 3. OPTIONAL: SOCKET ADAPTERS Limit 2 Socket Adapters per order. 10% Discount applied to Socket Adapters. ☐ Icelock 544 ☐ Male Pyramid □ 3-Prong Socket Adapter Socket Adapter Socket Adapter Titanium Aluminum Stainless Steel ☐ 4-Prong ☐ 4-Hole ☐ Male Pyramid

Socket Adapter

Aluminum

Socket Adapter

Stainless Steel

Insert for Prong

Stainless Steel

3. OPTIONAL: SOCKET ADAPTERS Limit 2 Socket Adapters per order. 10% Discount applied to Socket Adapters. ☐ Female Pyramid Insert for Prong





☐ 4-Hole Male Pyramid Aluminum







☐ 4-Hole Female Pyramid with 20/20 Offset

Stainless Steel



☐ 4-Hole Female Pyramid 20/20 Offset 10° Right Aluminum



☐ 4-Hole Female Pyramid 20/20 Offset 10° Left Aluminum



☐ Euro 4-Hole Adapter Aluminum

Aluminum



☐ 4-Hole Male Pyramid with Rotation Stainless Steel



☐ 4-Hole Pyramid Receiver with Rotation Stainless Steel



☐ Female Pyramid Insert for Prong LP Titanium



☐ 4-Hole Socket Adapter Titanium









☐ 4-Hole Male Pyramid with 8mm Offset Titanium



☐ Male Pyramid Insert for Prong Titanium



☐ 4-Hole Male Pyramid with Rotation Titanium



☐ 4-Hole Female Pyramid Titanium



☐ 4-Hole Male Pyramid Titanium



☐ 4-Hole Female Pyramid with Rotation Titanium



FOOT AND ADAPTER CHARACTERISTICS



FRESH WATERPROOF



water, the parts maintain

their integrity and continue

to provide the functionality

you expect.



WATERPROOF


Whether it's fresh water, salt water or chlorinated water, Waterproof Össur products will give you the maximum protection you need. The use of first-rate materials provides permanent protection against harmful ingress of water, even after submersion, whilst continuing to provide the functionality you expect.





WEATHERPROOF

A weatherproof device allows use in a wet and/or humid environment but does not allow submersion. Fresh water splashing against the enclosure from any direction shall have no harmful effect. Dry thoroughly after contact with fresh water. Fresh water: Includes tap water. Excludes salt and chlorinated water. For a weatherproof system, only weatherproof components must be selected.

NOTES:

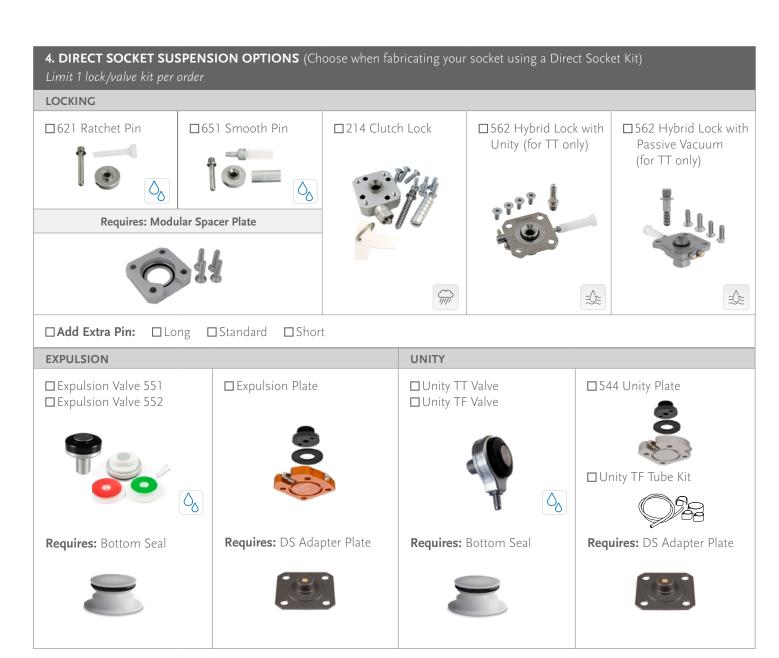

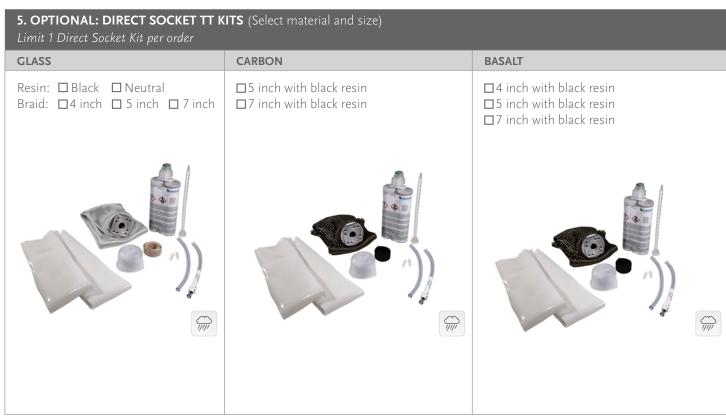

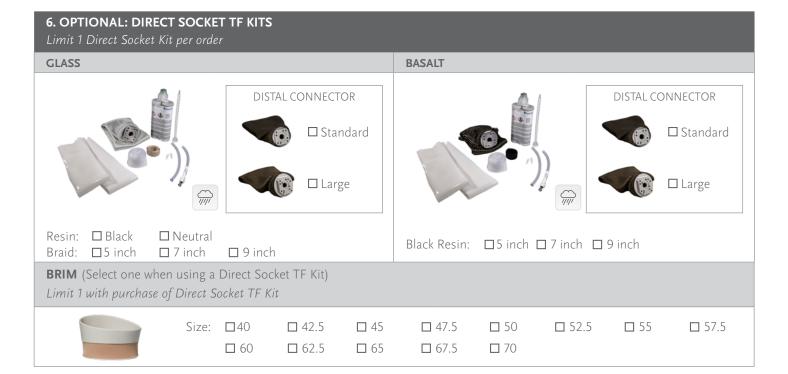

7. OPTIONAL: CONNECT TF PACKAGE KIT

Limit 1 Connect TF Socket Kit per order

☐ Connect TF Kit

Select your Size:

- ☐ Medium Short
 ☐ Medium Standard
- ☐ Large Short
- ☐ Large Standard
- □ Left □ Right







Note: Connect TF is only available as an option when purchased with Iceross TF Locking liner(s), AKOS, and Relax. One Connect TF socket kit per order. Connect TF includes integrated 200 series clutch lock.

