



Combining an incredible 27° ankle motion and significantly greater ankle power than a conventional carbon fiber foot, Pro-Flex Pivot has been developed specifically to enhance protection of the sound side. It closely mimics regular biomechanics, delivering a proven 11% reduction in load on the contralateral limb. *

- 27° ankle motion
- Helps reduce load on contralateral limb by 11%
- Innovative pivot mechanism
- · Aesthetically pleasing, anatomical foot cover

Össur recommends using Pro-Flex Pivot in conjunction with the sleeveless vacuum suspension system Unity®, which adds minimal weight and no extra build height, and does not interfere with Pro-Flex Pivot dynamics. Unity is designed to provide secure suspension in combination with Iceross Seal-In® technology, while stabilizing volume fluctuations and maintaining comfortable socket fit throughout the day.



1-7 22-30

920g (2,02lbs) w/ Foot Cover

155mm (6 1/8")

10mm (3/8")

Male Pyramid

| User Information | | |
|-------------------------|------------------------------|--|
| Amputation Level: | Transfemoral and Transtibial | |
| Impact Level: | Low to Moderate | |
| Maximum Patient Weight: | 125 kg (275 lbs) | |

| Unity System Information | |
|----------------------------|---|
| Maximum Vacuum: | 24inHg(610mmHg) |
| Normal Operating Pressure: | -15inHg to -23inHg |
| Added System Weight: | 75g (0,17lbs) w/ Pump, Socket Valve and Tube |

| | <i></i> | |
|---|---------|--|
| L | 44 | |









TECHNOLOGY

WEATHERPROOF





ANKLE POWER

* Heitzmann DW, Salami F, De Asha AR, Block J, Putz C, Wolf SI, Alimusaj M. Benefits of an increased prosthetic ankle range of motion for individuals OR users with transfemoral and transtibial amputation walking with a new prosthetic foot. Gait &posture. 2018 Jul 1;64:174-80



UNITY

Foot information Categories:

(Size 27, Cat. 5) Build Height: (Size 27)

Heel Height:

Adapter Options:

Sizes: Weight of Foot:



ORDERING INFORMATION

FOR COMPLETE FOOT



Please select the appropriate Unity Pump Module kit according to foot module size when placing an order and Unity will come preassembled on the foot. For extra convenience and system compatibility, Unity Valve Kits are highly recommended as a means of connecting to the socket.

For liner selection charts and item numbers please refer to the appropriate Iceross Seal-In page.


FOR COMPLETE FOOT WITH UNITY



CATEGORY SELECTION CHART

| Weight kg | 45-52 | 53-59 | 60-68 | 69-77 | 78-88 | 89-100 | 101-116 | 117-125 |
|-----------------------|--------|---------|---------|---------|---------|---------|---------|---------|
| Weight lbs | 99-115 | 116-130 | 131-150 | 151-170 | 171-194 | 195-220 | 221-256 | 257-275 |
| Low Impact Category | | | | | | | | |
| Sizes 22 | 1 | 1 | 2 | 3 | 4 | N/A | N/A | N/A |
| Sizes 23-24 | 1 | 1 | 2 | 3 | 4 | 5 | N/A | N/A |
| Sizes 25-26 | 2 | 2 | 2 | 3 | 4 | 5 | 6 | 7 |
| Sizes 27-28 | N/A | N/A | N/A | 3 | 4 | 5 | 6 | 7 |
| Sizes 29-30 | N/A | N/A | N/A | N/A | 4 | 5 | 6 | 7 |
| Moderate Impact Categ | gory | | | | | | | |
| Sizes 22 | 1 | 2 | 3 | 4 | N/A | N/A | N/A | N/A |
| Sizes 23-24 | 1 | 2 | 3 | 4 | 5 | N/A | N/A | N/A |
| Sizes 25-26 | 2 | 2 | 3 | 4 | 5 | 6 | 7 | N/A |
| Sizes 27-28 | N/A | N/A | 3 | 4 | 5 | 6 | 7 | N/A |
| Sizes 29-30 | N/A | N/A | N/A | 4 | 5 | 6 | 7 | N/A |


CLEARANCE

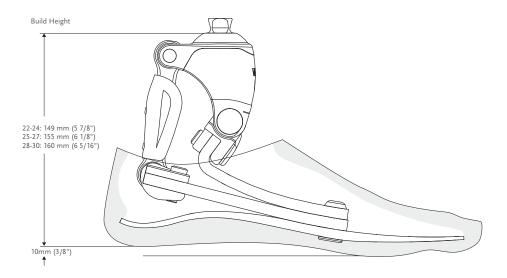

^{*}Note: Pro-Flex Pivot with Unity has the same build height as Pro-Flex Pivot.

KITS

PRO-FLEX PIVOT



- Includes:
 Foot Module
- Removable Foot Cover* with a black Spectra Sock

*For Pro-Flex Pivot with brown foot cover add a "BR" suffix to the part#.



FOOT KITS WITH UNITY

PRO-FLEX PIVOT AND UNITY PUMP



Includes:

- Foot Module
- Removable Foot Cover* with a black Spectra Sock
- Unity Pump

*For Pro-Flex Pivot with brown foot cover add a "BR" suffix to the part#

Note: Unity pump will come preassembled on the foot. Valve kit needs to be ordered separately.



UNITY

| Picture | Part# | Description | Applicable Foot Kits |
|---------|----------|-------------------------------------|---------------------------|
| 1 | UPF0001 | PFP Unity Pump S22-30 | Pro-Flex Pivot Size 22-30 |
| 2 | UTT0001 | Unity TT Valve Kit | All |
| 3 | UTF0001 | Unity TF Valve Kit | All |
| 4 | UTF0006 | Unity TF Tube Kit | All |
| 5 | L-5446XX | Icelock 544 Kit | All |
| 6 | UTT1103 | Unity Valve Air Filter Pack (10 p.) | All |













UNITY SPARE COMPONENTS

| Part# | Description |
|----------|----------------------------|
| UPF00011 | Unity PFP Components 22-30 |


Includes:

- Outlet Port
- Inlet Port
- Check Valves
- Unity Tube
- Unity Tube Clamp
- Loctite 243

COSMETIC FINISHING

FOOT COVER KIT, BEIGE AND BROWN*

PART#





Includes:

- Foot CoverFoot Cover AttachmentBlack Spectra Sock

FLEX-FOOT SOCKS

Used to cover the composite foot module to protect the foot and eliminate noise between foot module and foot shell.

| Part# | Description | Size | Color |
|-------------|----------------------|-------|-------|
| FCX63022 | FF Sock Small 1 pc | 22-25 | Black |
| FCX63025 | FF Sock Large 1 pc | 26-30 | Black |
| FCX63022-15 | FF Sock Small 15 pcs | 22-25 | Black |
| FCX63026-15 | FF Sock Large 15 pcs | 26-30 | Black |



^{*}For brown foot cover please add a "BR" suffix to the part number.