


ÖSSUR LEGS SOCKET SOLUTIONS (TT/TF) ORDER FORM

FACILITY INFORMATION						
Company Name: Clinician Name:		Ship to Address:				
Contact Number:						
Email:						
Purchase Order#						

REQUIRED PATIENT INFORMATION	
Patient Name:	Impact Level: High Med Low Amputation Level: TT TF Weight: kg. K-Level: K1 K2 K3 K4 Left Right

		red sizes and options) 2 Distal Cups, 1 Sleeve -	per order.						
LINER OPTIONS									
Locking Liners									
□ Iceform Locking	ceform Locking Original Locking		Dermo Locking	□ Synergy Locking	□ Sport Locking				
- -	ESSE Marine District	□ Wave	□Conical □Wave	□ Wave					
		Cush	ion Liners						
□ Iceform Cushion	□ Comfort Cushion	□ Dermo Cushion	□ Synergy Cushion	Relax 3C Cushion	□ Activa Cushion				
		□ Wave	□ Wave						
		Seal	-In Liners						
□ Seal-In V with Wave	□ Seal-In V HP with Wave	□ Dermo Seal-In	□ Seal-In X5 with Wave	□Seal-In X with Rings	□Seal-In X Locking				
	No. of the second se		Harris .						

1. TT LINERS (check one then fill in desired sizes and option	s)				
LINER SPECIFICATIONS					
Liner Size	Optional: Add additional liner of same type				
LINER SIZE	LINER SIZE				
□ 3mm □ 6mm □ 9mm (Iceform Only)	□3mm □6mm □9mm (Iceform Only)				
OPTIONAL ADD-ONS					
Optional: Add Distal Cups (Limit 2) Optional: Ad	dd Sleeve (Limit 1) Optional: Add Seal-Rings (Limit 2)				
	form □Iceross □Genu □Seal-Ring 1 □Seal-Ring 2				
1. TF LINERS (check one then fill in desired sizes and option: Limit 2 liners of same type, 2 Seal-Rings, 2 Distal Cups, 1 Sleev					
LINER OPTIONS					
	TF Liners] Relax 3C □ 4Seal □ Seal-In X5 □ Seal-In □ Seal-In X				
	TCushion Classic HSM				
LINER SPECIFICATIONS					
Liner Size	Optional: Add additional liner of same type				
LINER SIZE	LINER SIZE				
OPTIONAL ADD-ONS					
Optional: Add Distal Cups (Limit 2)	Optional: Add Seal-Rings (Limit 2)				
	□ Seal-Ring 1 □ Seal-Ring 2				
DISTAL CUP SIZE	ClassicClassicGripGripVolumeVolume				
Distal Cup 2	RING SIZE				
NOTES:					

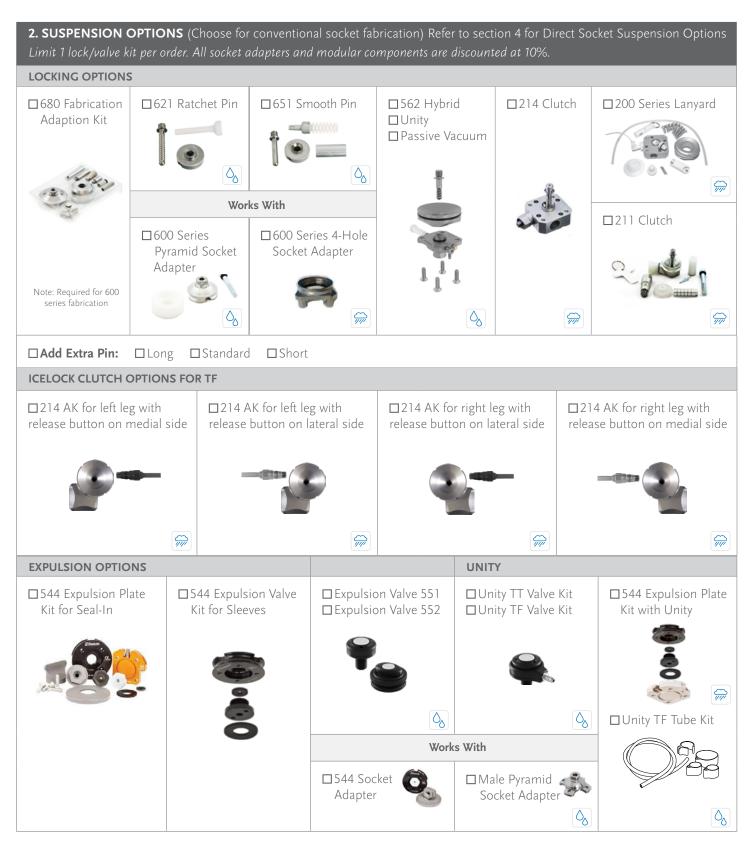



3. OPTIONAL: SOCKET ADAPTERS Limit 2 Socket Adapters per order. 10% L	Discount applied to Sock	et Adapters.					
□ Female Pyramid Insert for Prong Stainless Steel	☐ 4-Hole Male Pyramid Aluminum			ble Female mid hinum	2.0		
□ 4-Hole Female Pyramid with 20/20 Offset Aluminum	Pyramid 20/	□ 4-Hole Female Pyramid 20/20 Offset 10° Right Aluminum			□ 4-Hole Female Pyramid 20/20 Offset 10° Left Aluminum		
Euro 4-Hole Adapter Aluminum	Pyramid with Rotation	□ 4-Hole Male Pyramid with Rotation Stainless Steel		□ 4-Hole Pyramid Receiver with Rotation Stainless Steel			
□ Female Pyramid Insert for Prong LP Titanium	☐ 4-Hole Sock Adapter Titanium	et		ale Pyramid rt for Prong iium	a b	0	
□ 4-Hole Male Pyramid with 8mm Offset Titanium		□ Male Pyramid Insert for Prong Titanium			□ 4-Hole Male Pyramid with Rotation Titanium		
□ 4-Hole Female Pyramid Titanium	□ 4-Hole Male Pyramid Titanium				□ 4-Hole Female Pyramid with Rotation Titanium		
	FOOT AND ADA	PTER CHARACTERISTIC	CS				
WEATHERPROOF WEATHERPROOF WEATHERPROOF WEATHERPROOF WEATHERPROOF WEATHERPROOF WEATHERPROOF WEATHERPROOF WEATHERPROOF Notes:	re FRESH WATERPROOF* T	e of first-rate materials provide nent protection against harmfu s of fresh water. Even after rsion in fresh water, the parts in their integrity and continue ride the functionality you expec	WATERPROOF	or chlorinated Össur produc maximum pro use of first-rat permanent pr harmful ingre submersion, v	resh water, salt wa water, Waterproo ts will give you the tection you need. te materials provic otection against ss of water, even a vhilst continuing t nctionality you exp	f The les fter	

4. DIRECT SOCKET SUS Limit 1 lock/valve kit per c		noose when fabricating your	r socket using a Direc	t Socket Kit)
EOCKING	☐ 651 Smooth Pin	□214 Clutch Lock	□ 562 Hybrid Lock Unity (for TT on	ly) Passive Vacuum (for TT only)
Add Extra Pin: Lor EXPULSION		UNITY		
Expulsion Valve 551 Expulsion Valve 552	Expulsion Plate	Unity TT		□ 544 Unity Plate
Requires: Bottom Seal	Requires: DS Ada	pter Plate Requires:	Bottom Seal	Requires: DS Adapter Plate

5. OPTIONAL: DIRECT SOCKET TT K Limit 1 Direct Socket Kit per order	ITS (Select material and size)	
GLASS	CARBON	BASALT
Resin: □Black □Neutral Braid: □4 inch □5 inch □7 inch	□5 inch with black resin □7 inch with black resin	□4 inch with black resin □5 inch with black resin □7 inch with black resin
	<image/>	

GLASS					BASALT				
DISTAL CONNECTOR				É		DISTAL C	ONNECTOR		
						Ø	□ Standard		
			🕞 🗆 Lar	ge)) @		□ Large
Resin: □Black □N Braid: □5 inch □7	eutral inch	□ 9 inc	h		Black Resin	n: 🗆 5 inc	ch 🛛 7 inch	□ 9 inch	
BRIM (Select one when u Limit 1 with purchase of D	-		,						
	Size:	□36	38	□ 45	□ 40	□ 42	□ 44	□ 46	□ 48.5
		□ 51	□ 53.5	□ 56	□ 58.5	[6]	□ 64	67	□ 70

Connect TF Kit

Select your Size:

Medium Short
Medium Standard
Large Short
Large Standard

□ Left □ Right



Note: Connect TF is only available as an option when purchased with Iceross TF Locking liner(s), AKOS, and Relax. One Connect TF socket kit per order. Connect TF includes integrated 200 series clutch lock.

Page 6 of 6



Össur Australia TEL 1300 123 268 FAX +61 2 9475 1114 <u>cus</u>tomercare.au@ossur.com

