

# TF Solution Order Form Package

Thank you for ordering a TF Solution from Össur Solutions.

This package includes all the order forms needed to define the transfemoral leg, order the check socket, and order the definitive socket.

## Step One: Order the Solution

- Complete the TF Solution Order Form, and send to Solutions.
- Össur Solutions will then create and send you a quote detailing all items in the Solution.
- Approve the quote and provide a purchase order number to finalize the order.
- The new liners included with the Solution can be shipped before the check or definitive socket for casting/scanning/measurements by checking the box next to the Liners in the Products Section AND a Purchase Order is provided on the form.
- If special fabrication will be needed for check socket and/or definitive socket, complete the Special Fabrication portion of the check and/or definitive order forms. This ensures those items are included in the quote.
- Measure the residual limb.

*Cast/measure/scan over the same type and size liners the patient will use. Complete the Measurements section of the attached TF Solution Order Form. Send cast and TF Solution order form to Össur Solutions (see form for address).*

OR

### Order Online Using Össur Portal

You can order your Solution using these order forms, or you can order using the Össur Portal. Scan here for more information and to request access.



## Step Two: Fit the Check Socket, Make any Necessary Modifications

## Step Three: Order the Definitive Socket

- Fill out the attached TF Solution Definitive Socket Order Form.
- Send TF Solution Leg Definitive Socket Order Form and modified check socket to Össur Custom Solutions (see form for address).

This form is available in electronic form you can fill out electronically and email or print. Please contact Össur Customer Service for a copy.

# TF Solution Order Form Package

Send all casts, sockets, files to: 9545 S John Young Parkway, Ste #100, Orlando, FL 32819  
tel: (888)839-6213, fax: (800)831-3160 | cs@ossur.com | www.ossur.com

## Area Manager Information

Area Manager: phone: email:  
Notes:

## Billing & Shipping Information

Össur Account #:

Contact for ordering or delivery questions:

Contact:

Ship To:

Company:

Address:

City/State/Zip:

Contact:

Email:

Phone:

Fax:

Mobile Phone:

Email:

PO#:

Shipping Check Priority: Next Day Air **2nd Day**  
Include return shipping label (\$50 charge inside 48 states)

Completion of this order form with the most accurate and up-to-date information, including all patient information, measurements, and construction information enables us to provide the highest quality product for you and your patient.

## Required Patient Information

Last Name: Height: ft. in. Impact Level: High Med Low Amputation Level: TF KD  
First Name: Weight: lbs. K-Level: K1 K2 K3 K4 Left Right Bilat Order

## Measurements Call to disuss before design *\*may result in a delay in your order*

MEASUREMENTS**			SHAPE		DISTAL END SHAPES			
IT to Floor	KC to Floor	<b>Length:</b> Level Tight* Loose* 5cm 10cm 15cm 20cm 25cm 30cm	Shape by Measurements Shape by cast Shape from Socket Merge scan to Brim Fully Modified CAD file CAD file name:		Cylindrical	Squared	Bulbous	Conical
			<b>BRIM</b> Soft IC IC Quad		<b>*ALIGNMENT</b> Flexion: Adduction: *If a specific alignment isn't provided, ÖCS' standard alignment is 3° flexion & 3°adduction when using expulsion/elevated vacuum suspension or 0° flexion & 0° adduction when using locking suspension. NOTES:			
			<b>LINER USED</b>					
**Length and circumferences are required if Össur Custom Solutions is designing the socket. If not provided and socket fit requires remake, customer is responsible for cost of remake.  Cast sent to Össur Custom Solutions (optional) Check here to receive foam carving for this order.			Total Reduction % Ply  *The reduction is average of the tight and loose circumference measurements, if both sets are provided.		<b>CHECK SOCKET MATERIAL</b> Polyethylene terephthalate glycol ( <b>PETG</b> ) option High impact Polystyrene ( <b>Orfitrans Stiff, Thermolyn</b> ) option			

# TF Solution Order Form Package

## Special Fabrications

Flexible Inner Socket Plastics <i>Suggested L-code: 5651</i>	Fab Custom Inner From Sheet Material <i>Suggested L-codes: 5658 or 5656</i>		Other <i>Suggested L-codes: 5658 or 5656</i>
Flexible EVA with Silicone ( <b>Proflex with Silicone</b> ) Flexible EVA without Silicone ( <b>Proflex without Silicone</b> ) Flexible EVA – Black ( <b>Optek Flex Comfort - Black</b> ) Flexible EVA – Optek Flex Comfort White + Black ( <b>BiLam</b> ) Modified Polyethylene ( <b>MPE</b> ) EVA ( <b>ÖssurFlex</b> )	Lightweight Polyethylene – Firm 25 Shore A ( <b>PeLite</b> ) 12mm (1/2") beige white 5mm (3/16") beige 3mm (1/8") beige	Stovepipe Slit in lateral side Slit in medial side	Lightweight Ethylene Vinyl Acetate (Keasy Cone) 6.5mm profile, 10mm distal

### Fab Custom Pad

### RevoFit

<p><b>Fab Custom Pad on Check Socket</b></p> <p><b>Fab Custom Pad on Laminated Socket</b></p> <p>Lightweight Polyethylene – Medium Shore A (<b>Plastizote</b>)          12mm (1/2") pink white          6mm (1/4") pink          5mm (3/16") pink</p> <p>Lightweight Polyethylene – Firm 25 Shore A (<b>PeLite</b>)          12mm (1/2") beige white          5mm (3/16") beige          3mm (1/8") beige</p> <p>Location          Distal end (1/2") Other (see notes below)</p>	<p><b>RevoFit on Check Socket</b> <i>Suggested L-code: 5783</i></p> <p><b>RevoFit on Laminated Socket</b> <i>Suggested L-code: 5783</i></p> <p>Dial Location          Distal anterior medial Proximal lateral          Other (see notes below)</p> <p>Panel Locations          M/L panels (two panels) with Pads          Anterior &amp; Posterior panels (two panels) with Pads          Anterior only (one panel) with Pad          Posterior only (one panel) with Pad</p> <p>Pad on Panel          Firm Ethylene Vinyl Acetate 55 Shore A (<b>Puff</b>)          12mm (1/2") black          10mm (3/8") black          6mm (1/4") black</p> <p>Posterior "U" channel with proximal adjustability          See markings on cast/socket          Other (see notes below)</p>
<p style="text-align: center;"><b>Windows and Doors</b></p>	
<p><b>Windows and Doors on Check Socket</b></p> <p><b>Windows and Doors on Laminated Socket</b></p> <p>Fab Window(s) or cut out(s) Number:          Fab panel          Fab overlap door (draw window or door on cast/check socket, or use notes field below)          Add strap          Dacron Velcro</p>	<p style="text-align: center;"><b>Cosmetics</b></p> <p>Decorative Lamination on Definitive Using Fred's Legs Sleeve          Customer supplied          Össur to purchase Fred's item:</p> <p>Customer shaped foam cover (measurements in TF measurement chart) <i>Suggested L-code: 5705 or 5706</i>          Fab cosmetic distal end</p>


## Notes

# TF Solution Order Form Package


Products

1. Assembly (check one)

Partial Assembly: Customer cuts pylon to final height (default option)



Partial Assembly: Ossur cuts pylon to height using landmark to floor measurement



Full Assembly by Customer



Include Össur Leg Bag

2: Liners - Two are ALWAYS Included with Each Leg (check one then fill in desired sizes and options)

Send liners first for measurements/scanning/casting

Suggested L-code: 5673

TF Locking



LINER SIZE

Standard  
Conical

Suggested L-code: 5679

Seal-In X5 TF



4Seal Classic



Seal-In TF



LINER SIZE

Standard  
Conical

Seal-In X TF with Ring



Seal-In X TF Locking with Ring



Classic Seal Grip Seal Volume Seal

LINER SIZE

Standard  
Conical

Suggested L-code: 7700  
(only billed with L-5679)

Ring Size:

20

22

24

26

28

30

32

35

38

41

44

47

51

55

60

65





CLEAR FORM

4 of 13

# TF Solution Order Form Package

Products

3: Sockets (check options)

Check socket ONLY package	Check socket + Definitive package	Definitive ONLY package
<div></div> <div>Polyethylene terephthalate glycol (PETG) High Impact Polystyrene (Orfitrans Stiff, Thermolyn)  Flexible Inner Socket Flexible Inner Socket - Plastic Flexible Inner Socket - Sheet Material/Other (PeLite, Keasy Cone) Include second check socket</div>	<div><div></div><div>Polyethylene terephthalate glycol (PETG) High Impact Polystyrene (Orfitrans Stiff, Thermolyn)  Flexible Inner Socket Flexible Inner Socket - Plastic Flexible Inner Socket - Sheet Material/Other (PeLite, Keasy Cone) Include second check socket</div></div> <div><div></div><div>Laminated, with flexible inner Flexible Inner Socket - Plastic Flexible Inner Socket - Sheet Material/Other (PeLite, Keasy Cone) Laminated no flexible inner</div></div>	<div></div> <div>Laminated, with flexible inner Flexible Inner Socket - Plastic Flexible Inner Socket - Sheet Material/Other (PeLite, Keasy Cone) Laminated no flexible inner</div>
<div>NOTE: Exact Material selection is on definitive order form and not needed until the definitive form is ready for submission</div>		

Direct Socket TF

Brim Size:	36	38	40	42	44	46	48.5	51	53.5	56	58.5	61	64
	67	70											
						Fiberglass black resin		Fiberglass neutral resin			Basalt		Carbon
5" Material Kit (standard distal connector, 200 ml resin)													
7" Material Kit (400 ml resin) Medium Distal      Large Distal (Most Common)													
9" Material Kit - Large Distal (400 ml resin)													


4. Optional: Connect TF Package Kit


Connect TF Kit

Select your Size:

Medium Short  
Medium Standard  
Large Short  
Large Standard

Left      Right






Note: Connect TF is only available as an option when purchased with Iceross TF Locking liner(s), AKOS, and Relax. One Connect TF socket kit per order. Connect TF includes integrated 200 series clutch lock.

# TF Solution Order Form Package


## Products

### 5: Suspension & Socket Adapter - For Conventional Socket Fabrication

#### Locking Options

Icelock 621 Ratchet  
& Extra Pin 


*Suggested L-code: 5671*

Icelock 651 Smooth  
& Extra Pin 

*Suggested L-code: 5671*

Icelock  
600XM  


*Suggested  
L-code: 5671*

Icelock 850  
Hybrid  
L-850002  


*Suggested  
L-code: 5671*


Icelock 850 Hybrid L-850003  
*Suggested L-code: 5671*

#### Select One Adapter

Icelock 544 Socket  
Adapter  
Titanium 4-hole  
Socket Adapter  
3-Prong Socket  
Adapter  
4-Prong Socket  
Adapter

#### Works With

Icelock 672 Male Pyramid Ti   
Icelock 673 Male Pyramid Al

Icelock 674 4-Hole Adapter Al  
Icelock 675 4-Hole Adapter Ti  


Icelock 211 Clutch & Extra Pin

*Suggested L-code: 5671*

Icelock 214 4-Hole Clutch & Extra Pin 

Icelock 234 Lanyard

*Suggested L-code: 5671*



#### Icelock Clutch Options for TF

214 AK for left leg with  
release button on medial side

*Suggested L-code: 5671*



214 AK for left leg with  
release button on lateral side

*Suggested L-code: 5671*



214 AK for right leg with  
release button on lateral side

*Suggested L-code: 5671*



214 AK for right leg with  
release button on medial side

*Suggested L-code: 5671*



#### Expulsion Options

Icelock 544 Expulsion Kit for  
Seal-In 

*Suggested L-code: 5652*

Icelock 552 Expulsion Valve 

*Suggested L-code: 5652*

#### Unity Elevated Vacuum Options

Unity Valve TF 


Icelock 544 Unity Plate 

#### Works With

Icelock 544 Socket Adapter  
Titanium 4-hole Socket Adapter

3-Prong Socket Adapter  
4-Prong Socket Adapter

#### Unity TF Tube Kit



#### Bulldog Locks

3GEN-A – standard push lock  
3GEN-AGG – push lock with grooves  
BDSG-63 – ball bearing safety lock  
HDT-AP-TL Heavy Duty Top Loading Attachment Plate  
only (Does not include top load lock, HD pyramid, HD  
pylon, or HD tube clamp. Those items can be ordered  
through Bulldog Tools directly or a distributor)

#### KISS Suspension

KS1-A (Select either a 544 socket adapter or a prong adapter above)  
KS2-A  
KS4-A

#### ESP

Lyn Valve - AK RV Auto Expulsion PA0002/B

# TF Solution Order Form Package

## Products

### 6. Direct Socket Suspension Options (Choose when fabricating your socket using a Direct Socket Kit)

#### Locking

621 Ratchet Pin  
*Suggested L-code: 5671*



**Requires:** Modular Spacer Plate



651 Smooth Pin  
*Suggested L-code: 5671*



**Requires:** Modular Spacer Plate



214 Clutch Lock  
*Suggested L-code: 5671*



Icelock 850 Hybrid  
L-850001  
*Suggested L-code: 5671*



**Add Extra Pin:**    Long    Standard    Short

#### Expulsion

Expulsion Valve 551  
*Suggested L-code: 5671*  
Expulsion Valve 552  
*Suggested L-code: 5671*  
Lyn Valve - AK RV Auto  
Expulsion PA0002/B



**Requires:** Bottom Seal



Expulsion Plate  
*Suggested L-code: 5671*



**Requires:** DS Adapter Plate



#### Unity

Unity TT Valve  
Unity TF Valve



**Requires:** Bottom Seal



544 Unity Plate



Unity TF Tube Kit




































































**Requires:** DS Adapter Plate



Waterproof rated Össur products provide permanent protection against harmful ingress of fresh, salt or chlorinated water, even after submersion.

# TF Solution Order Form Package

7. Endoskeletal Components (check all that apply for a single prosthesis)					
4-Hole Adapters		Double Adapters		Single Adapters	
	4-Hole Male	 		Female Double Adapter 32mm	 
	4-Hole Female	 		Female Double Adapter 45mm	 
	4-Hole Male w/ Rotation	 		Female Double Adapter 60mm	 
	4-Hole Male w/ 8mm Ax Offset			Female Double Adapter 75mm	 
	4-Hole Female w/ Rotation	 	<b>Pylon Kits</b>		Other:
	4-Hole Female Pyramid 20/20 Offset 10° Right			Female Kit Short	 
	4-Hole Female Pyramid 20/20 Offset 10° Left			Female Kit Long	 
	Flexion Plate w/ 45mm Offset, 10° Flexion		<b>Height Adjustable Pylons</b>		
	Flexion Plate w/ 60mm Offset, 10° Flexion			Standard	 
	Flexion Plate w/ 75mm Offset, 15° Flexion			Long	 
<b>Prong Adapters</b>		<b>Torsion Shock Adapter (Extra Cost)</b>		<b>Tube Clamps</b>	
	4-Prong Socket Adapter			Torsion Shock Adapter <i>Suggested L-codes: 5984 and 5988</i>	 
	3-Prong Socket Adapter		<b>Rotation Adapter (Extra Cost)</b>		<p><b>* Patients under 220lb will be supplied with Aluminium adaptors unless specified.</b></p> <p>* Patients between 220-365lb will be provided with Titanium adaptors.</p> <p>Please check this box if you would prefer titanium adaptors.</p>
	Male Pyramid Insert for Prong	 		Knee Rotation Adapter (not included in package price) <i>Suggested L-code: 5926</i>	
	Female Pyramid Insert for Prong	 			
	Female Pyramid Insert for Prong LP				
<p>Össur may select different components to fit your dimensions if necessary. If you do not want Össur to make any changes, check this box:</p>					




# TF Solution Order Form Package


8: Knee (check one)

\*Knee locking/release cable guides will be laminated into the socket if provided to ÖCS unless requested differently on an order form.


Mechanical & Hydraulic Knee Options




Suggested L-codes: 5811  
Locking Knee




Suggested L-codes: 5611, 5850 and 5925  
Balance Knee OFM1 w/ IKF Adapter w/ Male Pyramid w/ Loop Adapter




Suggested L-codes: 5812, 5850 and 5925  
Balance Knee OFM2




Suggested L-codes: 5611, 5845 and 5850  
Total Knee 1900 A835300 Pyramid Top Extension Assist option




Suggested L-codes: 5814, 5845 and 5850  
Total Knee 2000 A835300 Pyramid Top Extension Assist option




Suggested L-codes: 5840, 5845 and 5850  
OHP3 Knee w/ IKF Adapter w/ Male Pyramid w/ Loop Adapter




Suggested L-codes: 5822, 5845 and 5850  
OP4 Knee



Suggested L-codes: 5840, 5845 and 5850  
Paso Knee




Suggested L-codes: 5814, 5845 and 5850  
Total Knee 2100 A835300 Pyramid Top Extension Assist option




Suggested L-codes: 5828, 5845 and 5925  
Mauch Knee Mauch Knee Plus†


Microprocessor Knee Options




Suggested L-codes: 5828, 5845, 5848, 5850, 5856 and 5925  
Rheo Knee



Suggested L-codes: 5828, 5845, 5848, 5850, 5856 and 5925  
Rheo Knee XC



Suggested L-codes: 5828, 5845, 5848, 5856, 5859  
Power Knee



Suggested L-codes: 5828, 5845, 5848, 5850, 5856 and 5925  
Navii

Navii Cover Selection - Select 1 additional Navii cover at no cost (Black standard cover included)

Standard Black

Standard Grey


Standard Blue


Standard Green


Standard Red


Medium Black


Long Black

















CLEAR FORM





























9 of 13


# TF Solution Order Form Package

## Products

**9: Foot: With or Without Unity** (check one and fill out the options below)

No Foot **Foot Options:** Foot Size: cm. Category (1-9) Left Right Foot Shell: Beige Brown

			Suggested L-Codes†		Suggested L-Codes†																
	Balance Foot S  with Unity	5972, 5986 5781*		Balance Foot S Torsion  with Unity	5972, 5984, 5988 5781*																
	Balance J with Unity	5976 5781*		K2 Sensation with DP Flexion with Unity	5972, 5986 5972, 5968 5781*																
	Pro-Flex ST  with Unity 	5981, 5986 5781*		Assure with Unity	5981 5781*																
	Pro-Flex LP Torsion with Unity	5981, 5984, 5988 5781*		Vari-Flex with Unity	5981‡ 5781*																
	Pro-Flex Pivot with Unity	5999, See Össur reimbursement guide		Pro-Flex LP  with Unity 	5981, 5986 5781*																
	Pro-Flex LP Align	5981, 5986, 5990		Proprio Foot  with Unity 	5973‡ 5781*																
	ReFlex Shock with Unity	5987‡ 5781*		ReFlex Rotate with Unity	5987‡, 5984‡ 5781*																
	Pro-Flex XC  with Unity 	5981‡ 5781*		Pro-Flex XC Torsion with Unity	5987‡, 5984‡ 5781*																
	Pro-Flex Modular 	5980‡, 5986‡	Desired build height (mm): With foot cover on. No return or exchange after foot is cut.			<table><tr><th>Foot Size</th><th colspan="2">Build Height</th></tr><tr><td></td><th>Min</th><th>Max</th></tr><tr><td>22-24cm</td><td>157mm</td><td>313mm</td></tr><tr><td>25-27cm</td><td>168mm</td><td>327mm</td></tr><tr><td>28-30cm</td><td>176mm</td><td>340mm</td></tr></table>	Foot Size	Build Height			Min	Max	22-24cm	157mm	313mm	25-27cm	168mm	327mm	28-30cm	176mm	340mm
Foot Size	Build Height																				
	Min	Max																			
22-24cm	157mm	313mm																			
25-27cm	168mm	327mm																			
28-30cm	176mm	340mm																			

 Waterproof rated Össur products provide permanent protection against harmful ingress of fresh, salt or chlorinated water, even after submersion.

\*Unity code added to other codes, e.g. Proprio Foot with Unity: 5973, 5781.

†The responsibility for accurate coding lies solely with the healthcare provider, Össur assumes no responsibility or liability for the provider's coding decisions.

‡PDAC approved.

# TF Solution Order Form Package

## Knit-Rite Soft-Socks (sold in packs of 3)

Knit-Rite socks sold in packs of three, not included in Össur Solution pricing.

### Measurement Instructions

Socks are sized in flat measurement, half of the circumference measurement correspond to the size measurements listed in the table. If the sock is used with a liner please measure the circumference with the liner on the patient.



Össur Soft-Sock — Black Polyester/Lycra® (Sold in Packs of 3)							
Lightweight	3-Ply	5-Ply	Size	Length	Top width	Toe width*	Fits to liner size
Qty.	Qty.	Qty.	Narrow Short	10"–14" (25–35 cm)	6" (15 cm)	4" (10 cm)	18, 20, 22
Qty.	Qty.	Qty.	Narrow Medium	16"–20" (40–50 cm)	6" (15 cm)	4" (10 cm)	18, 20, 22
Qty.	Qty.	Qty.	Narrow Long	22"–28" (55–70 cm)	6" (15 cm)	4" (10 cm)	18, 20, 22
Qty.	Qty.	Qty.	Regular X-Short	8"–12" (20–30 cm)	7–8" (17.5–20 cm)	4–5" (10–12.5 cm)	23.5, 25, 26.5, 28
Qty.	Qty.	Qty.	Regular Short	10"–14" (25–35 cm)	7–8" (17.5–20 cm)	4–5" (10–12.5 cm)	23.5, 25, 26.5, 28
Qty.	Qty.	Qty.	Regular Medium	16"–20" (40–50 cm)	7–8" (17.5–20 cm)	4–5" (10–12.5 cm)	23.5, 25, 26.5, 28
Qty.	Qty.	Qty.	Regular Long	22"–28" (55–70 cm)	7–8" (17.5–20 cm)	4–5" (10–12.5 cm)	23.5, 25, 26.5, 28
Qty.	Qty.	Qty.	Wide Short	10"–14" (25–35 cm)	9" (23 cm)	6" (15 cm)	28, 30, 32, 34
Qty.	Qty.	Qty.	Wide Medium	16"–20" (40–50 cm)	9" (23 cm)	6" (15 cm)	28, 30, 32, 34
Qty.	Qty.	Qty.	X-Wide Short	10"–14" (25–35 cm)	10" (25 cm)	7" (17.5 cm)	34, 36, 38, 40
Qty.	Qty.	Qty.	X-Wide Medium	16"–20" (40–50 cm)	10.0–12.0" (25–30 cm)	7–8" (17.5–20 cm)	36, 38, 40, 42, 45

\* measured 2 inch (5cm) above distal end

Össur Hole-In-Toe Soft-Sock - Black Polyester/Lycra® (Sold in Packs of 3)							
Lightweight	3-Ply	5-Ply	Size	Length	Top width	Toe width*	Fits to liner size
Qty.	Qty.	Qty.	Narrow Short	10"–14" (25–35 cm)	6" (15 cm)	4" (10 cm)	18, 20, 22
Qty.	Qty.	Qty.	Narrow Medium	16"–20" (40–50 cm)	6" (15 cm)	4" (10 cm)	18, 20, 22
Qty.	Qty.	Qty.	Regular X-Short	8"–12" (20–30 cm)	7–8" (17.5–20 cm)	4–5" (10–12.5 cm)	23.5, 25, 26.5, 28
Qty.	Qty.	Qty.	Regular Short	10"–14" (25–35 cm)	7–8" (17.5–20 cm)	4–5" (10–12.5 cm)	23.5, 25, 26.5, 28
Qty.	Qty.	Qty.	Regular Medium	16"–20" (40–50 cm)	7–8" (17.5–20 cm)	4–5" (10–12.5 cm)	23.5, 25, 26.5, 28
Qty.	Qty.	Qty.	Regular Long	22"–28" (55–70 cm)	7–8" (17.5–20 cm)	4–5" (10–12.5 cm)	23.5, 25, 26.5, 28
Qty.	Qty.	Qty.	Wide Short	10"–14" (25–35 cm)	9" (23 cm)	6" (15 cm)	28, 30, 32, 34
Qty.	Qty.	Qty.	Wide Medium	16"–20" (40–50 cm)	9" (23 cm)	6" (15 cm)	28, 30, 32, 34

\* Measured 2 inch (5cm) above distal end

# TF Definitive Socket Order Form

Send all casts, sockets, files to: 9545 S John Young Parkway, Ste #100, Orlando, FL 32819 | tel: (888)839-6213, fax: (800)831-3160 | cs@ossur.com | www.ossur.com

## Billing & Shipping Information

Össur Account #:  
CONTACT FOR ORDERING OR DELIVERY QUESTIONS:  
Contact:  
  
Email:  
  
Mobile Phone:

Ship To:  
Company:  
Address:  
City/State/Zip:  
Contact:  
Phone:  
Email:

Fax:

PO#:

Shipping Check Priority:    Next Day Air    **2nd Day**


Completion of this order form with the most accurate and up-to-date information, including all patient information, measurements, and construction information enables us to provide the highest quality product for you and your patient.

## Patient Information

Last Name:	First Name:	Weight:	lbs.	Impact Level: High	Medium	Low
Amputation Level: AK    KD	K-Level: K1    K2    K3    K4	Left:	Right:	Bilat Order:		

## Definitive Socket ■ Call to discuss before fabrication

TF Measurements for Cover

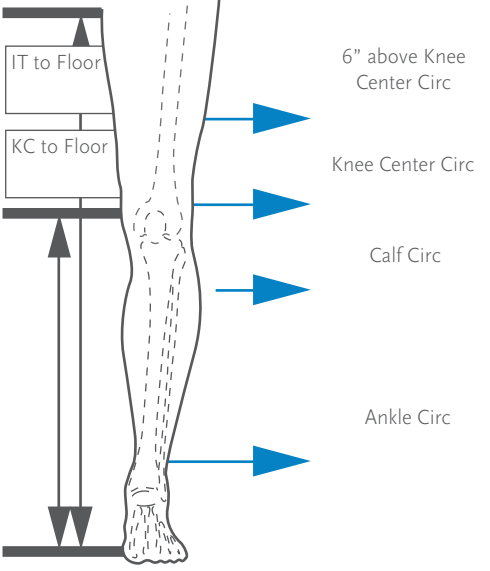

From Socket    From Cast    From CAD/AOP file dated:  
Fully Modified CAD file

Lamination

Carbon	Basalt	Heavy Duty Lamination
Decorative Lamination from	Color (PRS Pigment 1-16)	
Fred's Legs Sleeve	Customer supplied	
Össur to purchase Fred's item:		

Alignment

Transfer	Use Angles
Transfer and zero out	Flexion
Use Lines	Adduction
Other	

## Modifications

Socket Sizing				Prosthetic Height (optional)		
Increase	Decrease	Ply:	%:	Transfer	Extend:	Shorten:

## Special Fabrications

### Flexible Inner Socket Plastics

*Suggested L-code: 5651*

### Fab Custom Inner From Sheet Material

*Suggested L-codes: 5658 or 5656*

### Other

*Suggested L-codes: 5658 or 5656*

<p>Flexible EVA with Silicone (<b>Proflex with Silicone</b>)</p> <p>Flexible EVA without Silicone (<b>Proflex without Silicone</b>)</p> <p>Flexible EVA – Black (<b>Optek Flex Comfort - Black</b>)</p> <p>Flexible EVA – Optek Flex Comfort White + Black (<b>BiLam</b>)</p> <p>Modified Polyethylene (<b>MPE</b>)</p> <p>EVA (<b>ÖssurFlex</b>)</p>	<p>Lightweight Polyethylene – Firm 25 Shore A (<b>PeLite</b>)</p> <p>12mm (1/2") beige white</p> <p>5mm (3/16") beige</p> <p>3mm (1/8") beige</p>	<p>Stovepipe</p> <p>Slit in lateral side</p> <p>Slit in medial side</p>	<p>Lightweight Ethylene Vinyl Acetate (Keasy Cone) 6.5mm profile, 10mm distal</p>
---	---	---	---

### Fab Custom Pad

*RevoFit Suggested L-code: 5783*

<p>Lightweight Polyethylene – Medium Shore A (<b>Plastizote</b>)</p> <p>12mm (1/2") pink white</p> <p>6mm (1/4") pink</p> <p>5mm (3/16") pink</p> <p>Lightweight Polyethylene – Firm 25 Shore A (<b>PeLite</b>)</p> <p>12mm (1/2") beige white</p> <p>5mm (3/16") beige</p> <p>3mm (1/8") beige</p> <p>Location</p> <p>Distal end (1/2") Other (see notes below)</p>	<p>Dial Location</p> <p>Distal anterior medial Proximal lateral</p> <p>Other (see notes below)</p> <p>Panel Locations</p> <p>M/L panels (two panels) with Pads</p> <p>Anterior &amp; Posterior panels (two panels) with Pads</p> <p>Anterior only (one panel) with Pad</p> <p>Posterior only (one panel) with Pad</p> <p>Pad on Panel</p> <p>Firm Ethylene Vinyl Acetate 55 Shore A (<b>Puff</b>)</p> <p>12mm (1/2") black</p> <p>10mm (3/8") black</p> <p>6mm (1/4") black</p> <p>Posterior "U" channel with proximal adjustability</p> <p>See markings on cast/socket</p> <p>Other (see notes below)</p>
--	--


### Windows and Doors

<p>Fab Window(s) or cut out(s) Number:</p> <p>Fab panel</p> <p>Fab overlap door (draw window or door on cast/check socket, or use notes field below)</p> <p>Add strap</p> <p>Dacron Velcro</p>
--

### Cosmetics

<p>Decorative Lamination on Definitive Using Fred's Legs Sleeve</p> <p>Customer supplied</p> <p>Össur to purchase Fred's item:</p> <p>Customer shaped foam cover (measurements in TF measurement chart) <i>Suggested L-codes: 5705 or 5706</i></p> <p>Fab cosmetic distal end</p>
---

### Notes



Instagram



Facebook

ÖSSUR SOLUTIONS  
9545 S JOHN YOUNG PKWY, STE #100 | ORLANDO, FL 32819  
TEL (888) 839-6213, FAX (800) 831-3160  
CS@OSSUR.COM | OSSUR.COM

© ÖSSUR, 03.2025. CRE-21315

